

TOPHiKu6 (All-Black)

N-type TOPCon Technology

435 W ~ 465 W

CS6.1-54TM-435 | 440 | 445 | 450 | 455 | 460 | 465H

MORE POWER



Module power up to 465 W
Module efficiency up to 22.8 %



Excellent anti-LeTID & anti-PID performance.
Low power degradation, high energy yield



Lower temperature coefficient (Pmax): $-0.29\%/^{\circ}\text{C}$,
increases energy yield in hot climate



Lower LCOE & system cost

MORE RELIABLE



Minimizes micro-crack impacts



Heavy snow load up to 8100 Pa,
wind load up to 6000 Pa*

TRACEABLE SUPPLY CHAIN



Independently audited by STS



Industry Leading Product Warranty on Materials and Workmanship*



Linear Power Performance Warranty*

**1st year power degradation no more than 1%
Subsequent annual power degradation no more than 0.4%**

*Subject to the terms and conditions contained in the applicable Canadian Solar Limited Warranty Statement. Also this 25-year limited product warranty is available only for products installed and operating on rooftops in certain regions.

MANAGEMENT SYSTEM CERTIFICATES*

ISO 9001:2015 / Quality management system
ISO 14001:2015 / Standards for environmental management system
ISO 45001: 2018 / International standards for occupational health & safety
IEC62941: 2019 / Photovoltaic module manufacturing quality system

PRODUCT CERTIFICATES*

IEC 61215 / IEC 61730 / CE / CGC
CEC listed (US California) / FSEC (US Florida)
UL 61730 / IEC 61701 / IEC 62716 / IEC 60068-2-68
UNI 9177 Reaction to Fire: Class 1




* The specific certificates applicable to different module types and markets will vary, and therefore not all of the certifications listed herein will simultaneously apply to the products you order or use. Please contact your local Canadian Solar sales representative to confirm the specific certificates available for your Product and applicable in the regions in which the products will be used.

Canadian Solar (USA) Inc. is committed to providing high quality solar photovoltaic modules, solar energy and battery storage solutions to customers. The company was recognized as the No. 1 module supplier for quality and performance/price ratio in the IHS Module Customer Insight Survey. Over the past 23 years, it has successfully delivered over 133 GW of premium-quality solar modules across the world.


* For detailed information, please refer to the Installation Manual.

ENGINEERING DRAWING (mm)


Rear View

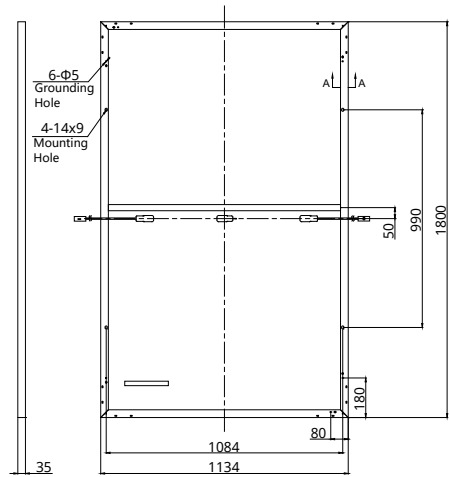

Frame Cross Section

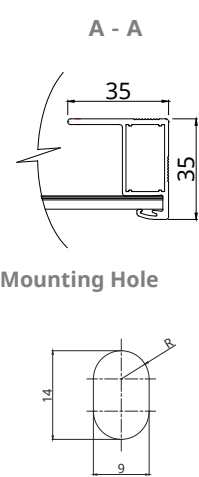

CS6.1-54TM-455H / I-V CURVES

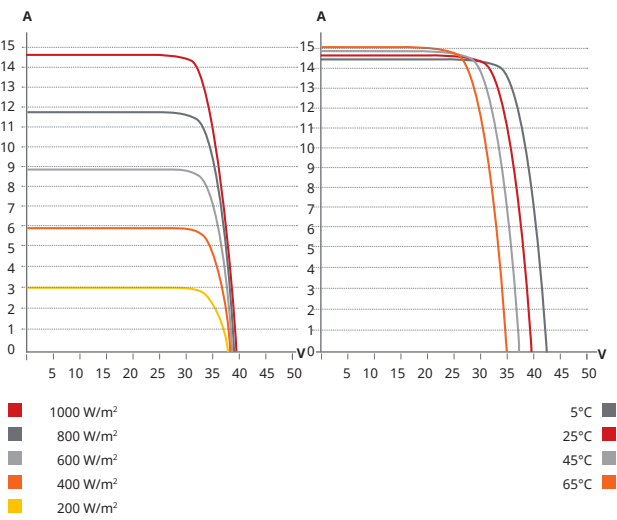

ELECTRICAL DATA | STC*

CS6.1-54TM	435H	440H	445H	450H	455H	460H	465H
Nominal Max. Power (Pmax)	435 W	440 W	445 W	450 W	455 W	460 W	465 W
Opt. Operating Voltage (Vmp)	32.4 V	32.6 V	32.8 V	33.0 V	33.2 V	33.4 V	33.6 V
Opt. Operating Current (Imp)	13.45 A	13.52 A	13.59 A	13.66 A	13.72 A	13.78 A	13.85 A
Open Circuit Voltage (Voc)	38.3 V	38.5 V	38.7 V	38.9 V	39.1 V	39.3 V	39.5 V
Short Circuit Current (Isc)	14.33 A	14.41 A	14.48 A	14.55 A	14.61 A	14.69 A	14.77 A
Module Efficiency	21.3%	21.6%	21.8%	22.0%	22.3%	22.5%	22.8%
Operating Temperature	-40°C ~ +85°C						
Max. System Voltage	1000V (IEC/UL)						
Module Fire Performance	TYPE 2 (UL 61730 1000V) or CLASS C (IEC 61730)						
Max. Series Fuse Rating	25 A						
Protection Class	Class II						
Power Tolerance	0 ~ + 10 W						

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

MECHANICAL DATA

Specification	Data
Cell Type	TOPCon cells
Cell Arrangement	108 [2 X (9 X 6)]
Dimensions	1800 × 1134 × 35 mm (70.9 × 44.6 × 1.38 in)
Weight	23 kg (50.7 lbs)
Front Cover	3.2 mm tempered glass with anti-reflective coating
Substrate	Black polymer (white on rear side)
Frame	Anodized aluminium alloy
J-Box	IP68, 3 bypass diodes
Cable	4 mm ² (IEC), 12 AWG (UL)
Connector	T6 or MC4 or MC4-EVO2 or MC4-EVO2A
Cable Length (Including Connector)	1500 mm (61.0 in) (+) / 1100 mm (43.3 in) (-)
Per Pallet	30 pieces
Per Container (40' HQ)	720 pieces

ELECTRICAL DATA | NMOT*


CS6.1-54TM	435H	440H	445H	450H	455H	460H	465H
Nominal Max. Power (Pmax)	328 W	332 W	335 W	339 W	343 W	347 W	351 W
Opt. Operating Voltage (Vmp)	30.5 V	30.7 V	30.9 V	31.1 V	31.3 V	31.5 V	31.7 V
Opt. Operating Current (Imp)	10.74 A	10.80 A	10.85 A	10.91 A	10.96 A	11.02 A	11.07 A
Open Circuit Voltage (Voc)	36.2 V	36.4 V	36.5 V	36.7 V	36.9 V	37.1 V	37.3 V
Short Circuit Current (Isc)	11.56 A	11.63 A	11.68 A	11.74 A	11.79 A	11.85 A	11.92 A

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.29 % / °C
Temperature Coefficient (Voc)	-0.25 % / °C
Temperature Coefficient (Isc)	0.05 % / °C
Nominal Module Operating Temperature	42 ± 3 °C

PARTNER SECTION

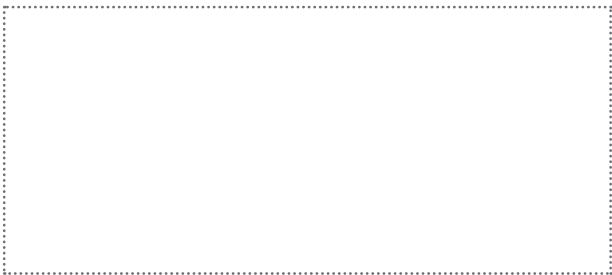

* The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. Canadian Solar Inc. reserves the right to make necessary adjustment to the information described herein at any time without further notice.
Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.